



KIOTI RANGE

Run ahead of the pack



KIOTI & DAEDONG

Kioti Tractor is the trade name for Daedong tractors in North America and Europe. Daedong Industrial Company, Ltd., which is based in Daegu, South Korea, was founded in 1947, producing its first tractor in 1968. Starting with the successful introduction of the first water-cooled diesel engine in 1949, Daedong has continued to be a pioneer in the development of mechanised farming equipment technology. Noteworthy accomplishments include the power tiller in 1963, followed by the development of a full product line of tractors, combines, rice transplanters and garden tillers. Even now, Daedong is investing heavily in leading-edge technologies and new production facilities to assure the world class competitiveness of Kioti Daedong products. Daedong Industrial Co, Ltd., located in Daegu, South Korea, has been a world leader in the engineering and development of farming equipment for more than 50 years.

Daedong's successful efforts at export diversification have resulted in the acceptance of Daedong products in more than 30 global markets. The demands of customers who have relied on Daedong to fulfil their farming equipment requirements for 50 years can also rely on Daedong to respond to the wide range of challenges and opportunities faced by the global agricultural community in the 21st century.

Daedong has received various certificates from the EPA and the EEC as well as the ISO certificates ISO9001 and ISO14001. Daedong always provides customers with high quality products and services at competitive prices. For the past 70 years, Daedong has reached the goal to become a clean company with responsibility to the environment and to be a positive influence in the Agricultural industry.



Family spirit

Kioti UK Ltd. are owned and supported by the family run POLS group based just outside Rotterdam in Holland. The POLS group are responsible for selling Kioti products throughout Holland, Belgium, France, Luxembourg and Switzerland.

The Kioti UK team is small yet dynamic with many years of practical experience in the industry and with the Kioti products. They are very much part of the Kioti Family. As are many of our dealers who have sold Kioti for a long time.

We hope that your experience with Kioti is also positive and that after a short period of time you will also feel part of the Kioti family".

Central spare parts location

The Spare Parts centre is located in Holland. Spare parts can be distributed by emergency service from the Rotterdam HQ overnight. Additional spare parts are held at the Kioti EU headquarters also located in Rotterdam. The parts are freely available within 24 to 48 hours throughout the UK. Pols Group has stock for 7 countries and 20 years of history in supplying Kioti spare parts.



SERIES ZX
(24-25 HP)



SERIES CS
(21-25 HP)



SERIES CX10
(25 HP)



SERIES CK30
(26-50 HP)



SERIES DK20
(45-60 HP)



SERIES RX
(66-73 HP)



SERIES PX
(103-115 HP)



K9
(24 HP)



1947
Foundation of DAEDONG Industrial in Jinju-si, Gyeongsangnam-do



1956
Building of engines and diesel engines



1962
Production of the first Korean tiller



1968
First tractor produced in Korea



1970
First rice harvester produced in Korea



1973
First rice planter produced in Korea



1993
Foundation of Kiota Deadong USA



1996
Certification according to ISO 9001 en ISO 14001



2008
Award for Export a value of 100 million USD



2009
First Mechron 2200 UTV



2010
Foundation of Kiota EU in The Netherlands in cooperation with Pals Group



2013
First Stage IIIB engine produced (common-rail and DPF filter)



2015
Official partner of the Olympic Winter Games 2018 in Pyeongchang



2016
Third time in a row Winner of the 'Gold Level Status Award' of the American Dealer Association (EDA)



2018
Foundation of Daedong Canada Inc. (Canada)



2020
Launch ZERO TURN mower



2021
Introduction of the STAGE 5 tractors

SPECIFIED TO ORDER


photos of some sales



KIOTI FRONT END LOADERS

Kioti have been offering reliable and strong but well priced front loaders for a number of years.

The Kioti KL55N range of front loaders is specially designed for the DK series of tractors. There are three variations to suit the correct model. The loader is controlled by a joystick control. For the DK4510 and DK5010 the joystick is part of the loader. On the DK6010C / CH models the joystick is a standard feature of the cabin. The front loader is easily mounted and removed using two leg stands that are a permanently fitted to the loader. The loader has a float position and an indicator showing the angle of the bucket. As you would expect for a tractor of this size and quality the loader has a parallelogram linkage.

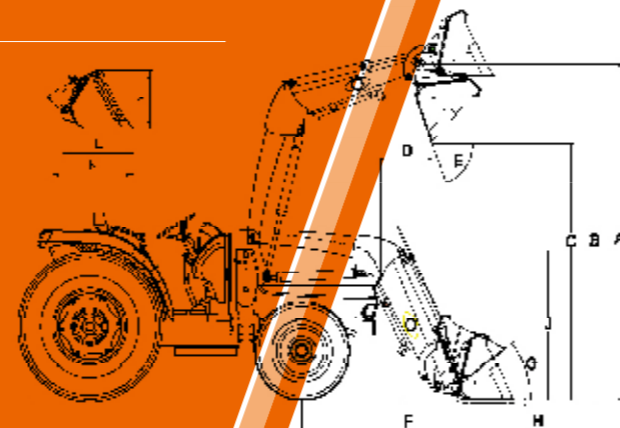

Front End Loader

Model		KL115	KL2510	KL4010	KL5510	KL7320	KL1103
		CS2220M CS2610	CK2810H CK3310H	CK3520 CK3510CH CK4010CH CK4010HU	DK4510HS DK5010HS DK6010CH	RX7330PC	PX1053PC PX1153PC
A	Maximum Lift Height	mm	1.793	2.230	2.500	2.768	3.670
B	Clearance with Attachment Level	mm	1.632	2.141	2.360	2.449	3.307
C	Clearance with Attachment Dumped	mm	1.336	1.706	2.010	2.075	2.703
D	Reach at Maximum Height	mm	323	800	690	460	522
E	Maximum Dump Angle	°	73,8	53	48	58	60,3
F	Reach with Attachment on Ground	mm	1.369	1.498	1.580	1.800	2.043
G	Attachment Rollback Angle	°	35	33	28	38,9	49,5
H	Digging Depth Below Grade	mm	114	99	135	231	166
J	Overall Height in Carry Position	mm	1.065	1.016	1.260	1.465	1.760
L	Depth of Attachment (to back of inner shell)	mm	374	498	505	470	592
M	Height of Attachment	mm	452	411	526	560	581
N	Depth of Attachment (to pivot pin)	mm	485	632	682	660	838
	Lift Capacity to Full Height at Pivot Pins	kg	527	481	832	1.207	1.535
	Breakout Force at Pivot Pin	kg	875	835	1.571	1.769	2.431
	Breakout Force (while tilting)	kg	288	863	1.363	2.227	1.605
	Bucket Width	mm	1.220	1.270	1.524	1.676 / 1.830	2.083
	Total Weight with Bucket	kg	235	530	498	640	860
	Bucket Capacity	m³	0,17 / 1,12	0,19 / 0,12	0,19 / 0,125	0,37 / 0,25 0,43 / 0,298	0,6 / 0,38
	Mechanical Parallel Guidance		Std.	None	Std.	Std.	Std.
	Quick Change (type)		Kioti	Kioti / SKID	EURO	EURO	EURO
	3e function for Hydraulic Tools		Opt.	None	Opt.	Opt.	Opt.

* NOTE: Pallet forks available.

* NOTE: Specifications and design are subject to change without notice.



Zero Turn mowers

ZX SERIES (24~25 HP)

Residential & Commercial.

- Ergonomic Controls
- User-friendly Control Panel
- Large Fuel Capacity

- Comfortable Seating
- 48" & 54" Cutting Widths
- Excellent Cut Quality

OPTIONAL EQUIPMENT

- Mulching Kit
- Anti-Scalp Roller Kit (54" models only)
- Work Lamp Kit

- Headlamp Kit
- Hitch Kit

** Engine and transmission

Model	ZXR48EU	ZXR54EU	ZXC48EU	ZXC54EU	
	Heavy-Duty Residential		Premium Commercial		
Engine					
Type	Briggs & Stratton Professional Series™		Briggs & Stratton Commercial Series™		
Engine Gross	hp (kW)	22 (16.40)	24 (17.89)	23 (17.15)	25 (18.64)
Displacement	cc	724	724	724	724
Choke	Auto		Manual Lever		
Fuel Capacity	l	28.39 (1 Tank on Left Side)		47.31 (2 Tanks; Left and Right Side)	
Fuel Requirement	Unleaded Gasoline (87 Octane or higher)				
Drive train					
Model	Hydrogear ZT2800		Hydrogear ZT3400		
Displacement (Pump/Motor)	cc	10/16	12/16		
Pto type					
Clutch	ft/lb	125		200	
Electrical					
Charging System	amp	16		16	
Tire size					
Front	13x5-6		13x6.5-6		
Rear	22x9.5-10		23x10.5-12		
Traveling speeds					
Forward	km/h	12.87		16.1	
Parking Brake	Internal Intergrated in Axle				
Dimensions					
Overall Length	mm	2049.78		2049.78	
Overall Width (Chute Down)	mm	1541.78	1709.42	1541.78	1709.42
Overall Height (ROPS Upright)	mm	1790.7		1816.1	
Wheelbase	mm	1231.9		1231.9	
Width (Tire to Tire)	mm	1277.62		1303.02	
Approximate Curb Weight	kg	405.05	412.76	425.92	434.08
Mower deck					
Mower Deck Type	Fabricated				
Lift Mechanism	Foot Pedal				
Deck Steel Thickness	10-gauge with 7-gauge at edge area				
Anti-Scalp Ball Rollers	5 (4 front, 1 rear)	6 (4 front, 2 rear)	5 (4 front, 1 rear)	6 (4 front, 2 rear)	
Cutting Width of Mower	mm	1219.2	1371.6	1219.2	1371.6
Blades	Notched (Optional Serrated)				
Cutting Height	mm	38.1-127			
Discharge Chute	Side (Molded Rubber)				
Deck Height Adjustment	Dial Type				
Seat					
Suspension	N/A		Premium Suspension kit with High Back		
Sliding Adjustment			Standard		
Back Rest	Normal		Extra High		
Arm Rest & Seat Belt			Standard		
Standard/optional					
Foldable ROPS			Standard		
Seat Switch			Standard		
Keyless Start			Standard		
LED Head Light	Optional		Standard		
Productivity					
based on 80% efficiency	ha/h (ca.)	1.26	1.41	1.57	1.76

* NOTE: Specifications and design are subject to change without notice.



Subcompact-tractor CS SERIES (21~25 HP)

Dynamic and compact.

- Premium diesel engine
- Mechanical- or HST-transmission
- HST twin pedals
- Fourwheel drive
- Foldable ROPS
- Illuminated dashboard
- Road lights
- Mid PTO (HST model only)
- 3-point linkage
- Power steering
- Comfortable driving seat
- Cabin (opt.)
- Frontlinkage (opt.)
- Front PTO (opt.)
- Mid mower (opt.)

Model		CS2220U-EU mech	CS2510HST	CS2520HST-GE
Engine				
Manufacturer		Daedong	Daedong	Daedong
Model		3c100LWM-E1	3c100LWH-E2	3c100LWH-E2
Maximum Power (ECE-R120)	hp	21	24,5	24,5
Rated Revolution	rpm	3.200	3.200	3.200
Maximum torque?	nm	46	54	54
Number of cylinders		3	3	3
Cylinder capacity	cc	1007	1007	1007
Compression rate		21,1	21,1	21,1
Volts / Amps		12v / 55a	12v / 55a	12v / 55a
Cooling type		water cooled	water cooled	water cooled
Fuel tank capacity	l	23,5	25,5	25,5
PTO				
Rear PTO		540	540	540
Transmission clutch type		Live Mechanical clutch	Independent	Independent
Mid PTO	rpm	2.200	2.200	2.200
Hydraulic system				
Volume of system with twin tandem pump	lpm	25,7	24,6	26,4
Position control		Yes	Yes	Yes
Linkage		CAT 1	CAT 1	CAT 1
Maximum lift capacity	kg	715	715	715
Maximum lift capacity (610mm behind link arm ends)	kg	318	318	318
Number of double acting rear spools		1 x Standard	1 x Standard (2nd option)	1 x Standard (2nd option)
Transmission type		Mechanical	Hydrostatic	Hydrostatic
Transmission type		4 wheel drive	4 wheel drive	4 wheel drive
Rear differential lock		Standard	standard	standard
Steering		Hydraulic Power steering	Hydraulic Power steering	Hydraulic Power steering
Adjustable steering wheel		N/A	N/A	Standard
Front loader Joystick		With loader	With loader	Standard
Speeds				
Forward	km/h (mph)	1.13-19.32(0.70-12.0)	0-16.6	0-15.4 (0-9.57)
Reverse	km/h (mph)	1.39-7.50(0.86-4.66)	0-11.2	0-10.6 (0-6.6)
Dimensions				
Total length (with rear linkage)	mm	2,623	2,523	2,523
Overall Total width	mm	1,070 (AG)	1,270	1,168 (IND)
Total height with folding ROPS Raised	mm	2,123 (AG)	2,280	2,280
Total height with cabin	mm	-	1,990	1,990 (w/o beacon)
Wheel base	mm	1,500	1,400	1,400
Ground clearance	mm	190 (AG)	162	162
Minimum turning radius w/brake	mm	2,526 (AG)	2,540	2,540
Weight with ROPS	kg	710	700	705
Weight with Cabin	kg	-	-	875
Tyres				
Front AG Tyres		5-12	-	-
Rear AG tyres		8-16	-	-
Front grass tyres		18 x 8.5-10 R3	18 x 8.5-10 R3	18 x 8.5-10 R3
Rear grass tyres		26 x 12.00-12 R3	26 x 12.00 R3	26 x 12.00 R3
Front Industrial tyres		18 x 8.5-10 R4	18 x 8.5-10 R4	18 x 8.5-10 R4
Rear Industrial tyres		26 x 12.00-12 R4	26 x 12.00 R4	26 x 12.00 R4

* NOTE: Specifications and design are subject to change without notice.



Versatile compact tractor
CX10 SERIES (24,5 HP)

Allround utility tractor.

- Premium dieselenigne
- Mechanical- or HST-transmission
- Joystick for frontloader
- Fourwheel drive
- Foldable ROPS
- Illuminated dashboard
- Road lights
- High groundclearance
- Hst twin pedals
- Mid PTO (opt.) Rear PTO Standard
- 3-point linkage
- Power steering
- Comfortable driving seat
- Cabin with a.c. (opt.)
- Frontlinkage (opt.)
- Front PTO (opt.)
- Mid ROPS (opt.)

Model		CX2510M	CX2510H	CX2510CH
Engine				
Manufacturer		Kioti	Kioti	Kioti
Maximum power (ECE-R120)	hp	24,5	24,5	24,5
Rated speed	rpm	2600	2600	2600
Maximum torque	nm	88	88	105
Number of cylinders		3	3	3
Cylinder	cc	1647	1647	1647
Compression Rate		21.7	21.7	21.7
Volts / Amps		13.5 / 75	13.5 / 75	13.5 / 75
Cooling System Water		Water Cooled	Water Cooled	Water Cooled
Fuel tank capacity	litres	25	25	25
PTO				
Rear PTO	rpm	540	540	540
PTO Type		Live	Independent	Independent
Mid PTO (Option)	rpm	2000	2000	2000
Front PTO (Option)	rpm	2000 / 1000	2000 / 1000	2000 / 1000
Hydraulic system				
Total Tandem pump system volume	l/min	43 (26 auxiliery)	43 (26 auxiliery)	43 (26 auxiliery)
Position Control		Standard	Standard	Standard
Link arm linkage type		Cat 1	Cat 1	Cat 1
Maximum lifting force at link arm end	kg	740	740	740
Maximum lift capacity 610 mm behind link arms	kg	546	546	546
Front Loader Joystick		Standard	Standard	Standard
Number of double acting valves		1 d/a (2 ports)	1 d/a (2 ports)	1 d/a (2 ports)
Power transmission type		Mechanical	Hydrostatic	Hydrostatic
4 wheel drive		4 wheel drive	4 wheel drive	4 wheel drive
Transmission Gears / Ranges		6F 2R	2 Range Twin pedal	2 Range Twin pedal
Rear Axle differential lock		Standard	Standard	Standard
Steering		hydraulic Power Steering	hydraulic Power Steering	hydraulic Power Steering
Speed				
Forward	km/h	1.22 - 19.07	0 -21.74	0 -21.74
Reverse	km/h	1.51 - 7.40	0 - 15.22	0 - 15.22
Dimensions				
Total Length with 3 point linkage	mm	2790	2790	2790
Total width (AG tyres inset)	mm	1185	1185	1185
Total height with Folding ROPS Raised	mm	2335	2335	N/A
Total Height with Cabin with Ag tyre	mm	N/A	N/A	2200
Wheel base	mm	1520	1520	1520
Minimum Turning Circle (w/brake)	mm	2750	2750	2750
Weight with ROPS	kg	1047	1047	N/A
Weight with Cabin	kg	N/A	N/A	1272
Tyres				
Front Agri		7 - 12/6	7 - 12/6	7 - 12/6
Rear Agri		11.2 - 16 / 6	11.2 - 16 / 6	11.2 - 16 / 6
Front Turf		23 x 8.5-12	23 x 8.5-12	23 x 8.5-12
Rear Turf		33 x 12.5-16.5	33 x 12.5-16.5	33 x 12.5-16.5
Front Industrial		23 x 8.5-12	23 x 8.5-12	23 x 8.5-12
Rear Industrial		12-16.5	12-16.5	12-16.5

* note specifications and design are subject to change



Compact tractor with the highest user value

CK30 SERIES (25~50 HP)

Premium compact tractor.

- Premium diesele engine
- Commonrail + dpf on CK4030/5030
- 3-point linkage
- Tight turning radius
- Power steering
- Comfortable driving seat
- Cabin version with A/C
- Road lights
- Heated rear screen on Cabin version
- Auto-PTO
- Mid PTO (opt.)
- Mechanical- or HST-transmission
- Twin Pedal HST
- Joystick for frontloader
- Fourwheel drive
- Foldable ROPS
- Illuminated dashboard
- Frontlinkage (opt.)
- Front PTO (opt.)
- Cruise control
- Mid rops on CK2630D
- Draft control on CK2630D
- Linked pedal



Model	CK2630D	CK2630H/CH	CK3530H/CH	CK4030H/CH	CK5030H/CH
Engine					
Manufacturer	Kioti	Kioti		Kioti	Kioti
Maximum power (ECE-R120)	hp 25	25	35	40	50
Rated speed	rpm 2400	2400	2600	2600	2600
Maximum torque	nm 84	84	115	118	166
Number of Cylinders	3	3	3	3	3
Cylinder capacity	cc 1647	1647	1826	1826	1826
Compression ratio	22:1	22:1	22:1	22:1	22:1
Alternator	volts / amps 12 / 75	12 / 75	12 / 75	12 / 75	12 / 75
Cooling System	Water Cooled	Water Cooled	Water Cooled	Water Cooled	Water Cooled
Fuel Tank Capacity	litres 34	34	34	34	34
PTO					
Rear PTO	Independent	Independent	Independent	Independent	Independent
Rear PTO	rpm 540/540E	540/540E	540/540E	540/540E	540/540E
Maximum PTO	hp 30,4	34,8	28,9	32	32
Mid PTO	rpm 2000 (optional)	2000 (optional)	2000 (optional)	2000 (optional)	2000 (optional)
Front PTO speed	rpm 1000 (Optional)	1000 (Optional)	1000 (Optional)	1000 (Optional)	1000 (Optional)
Hydraulic System					
Total capacity of system with Dual pump	l 39.6 (24 external auxiliary valves)	39.6 (24 external auxiliary valves)	42.9 (26 external auxiliary valves)	42.9 (26 external auxiliary valves)	42.9 (26 external auxiliary valves)
Position Control	Standard	Standard	Standard	Standard	Standard
Linkage	Cat 1	Cat 1	Cat 1	Cat 1	Cat 1
Maximum Lift capacity at Link arm ends	kg 1030	1030	1030	1030	1030
Maximum Lift 610 mm behind link arm	kg 740	740	740	740	740
Double of Double acting spool valves	1 (2nd option)	1 (2nd option)	1 (H) 2(CH)	2	2
Loader Joystick	Option	Standard	Standard	Standard	Standard
Transmission type	Mechanical (12x12)	HST 3 range twin pedal	HST 3 range twin pedal	HST 3 range twin pedal	HST 3 range twin pedal
Axle drive type	4 wheel drive	4 wheel drive	4 wheel drive	4 wheel drive	4 wheel drive
Type of Shuttle	Synchronised	HST Drive	HST Drive	HST Drive	HST Drive
Rear Axle differential lock	Standard	Standard	Standard	Standard	Standard
Steering	Hydraulic power steering	Hydraulic power steering	Hydraulic power steering	Hydraulic power steering	Hydraulic power steering
Speeds					
Forward speeds	km/h 1.31 - 15.50	0 - 16.11	0 - 25.48	0 - 25.48	0 - 25.48
Reverse Gears	km/h 1.27 - 15.10	0 - 11.28	0 - 17.58	0 - 17.58	0 - 17.58
Dimensions					
Total length including link arms	mm 3070	3070	3070	3070	3070
Total width with Ag wheels inset	mm 1385	1385	1385	1385	1385
Total height with folding ROPS raised	mm 2118	2507 (H)	2507	2507	2507
Total height with Cabin	mm N/A	2359	2359	2359	2359
Wheel base	mm 1670	1670	1670	1670	1670
Ground clearance	mm 340	340	340	340	340
Turning Radius	mm 2450	2450	2450	2450	2450
Weight with ROPS	kg 1215	1240	1240	1240	1240
Weight with Cabin	kg 1503	1503	1578	1578	1578
Tyres					
Ag tyres Front	7 - 16	7 - 16	7 - 16	7 - 16	7 - 16
Ag Tyres Rear	11.20 - 24	11.20 - 24	11.20 - 24	11.20 - 24	11.20 - 24
Grass tyres Front	27x8.5-15	27 x 8.5-15	27 x 8.5-15	27 x 8.5-15	27 x 8.5-15
Grass tyres Rear	41 x 14-20	41 x 14-20	41 x 14-20	41 x 14-20	41 x 14-20
Galaxy Golf Turf special front	27 x 12LL-15	27 x 12LL -15	27 x 12LL -15	27 x 12LL -15	27 x 12LL -15
Galaxy Golf Turf special Rear	41 x 18LL - 16.10	41 x 18LL - 16.10	41 x 18LL - 16.10	41 x 18LL - 16.10	41 x 18LL - 16.10
Industrial tyres front	25 x 8.50 -14	25 x 8.50 -14	25 x 8.50 -14	25 x 8.50 -14	25 x 8.50 -14
Industrial tyres Rear	15 - 19.50	15 - 19.50	15 - 19.50	15 - 19.50	15 - 19.50

* NOTE: Specifications and design are subject to change without notice.



For serious business

DK20 SERIES (45~60 HP)

Professional Mid-size tractor.

- Premium diesele engine (CRDI Stage V)
- Mechanical and HST-transmission
- Twin-Pedal HST or synchronised HS-shuttle
- Power steering
- Fourwheel drive
- Foldable ROPS
- Illuminated dashboard
- Road lights
- Auto PTO
- Cabin version with Loader Joystick control
- Automatic Trailer Hitch (opt.)

- Rear PTO 540/540E (mech.) 1000 rpm opt. mech.
- 3-point linkage
- Tight turning radius
- Rear spool valve with detent Option
- Comfortable driving seat
- Cabin version with A/C
- Frontlinkage (opt.)
- Front PTO (opt.)
- Cruise PTO (Cabin models)
- Linked Pedal (Cabin models)



Model	DK4520H/C/CH	DK5020HS/NHS/C	DK6020H/HS/NHS	DK6020C/CH
Engine				
Manufacturer	Kioti	Kioti	Kioti	Kioti
Maximum Power (ECE-R120)	45 hp	50.3 hp	57.7 hp	57.7 hp
Rated speed	2600 rpm	2600 rpm	2600 rpm	2600 rpm
Maximum torque	148 nm	166 nm	187 nm	187 nm
Number of Cylinders	3	3	3	3
Turbo	Yes	Yes	Yes	Yes
Cylinder Capacity	1826 cc	1826 cc	1826 cc	1826 cc
Compression ratio	17.4:1	17.4:1	17.4:1	17.4:1
Alternator	12 volts / 75 amps	12 volts / 75 amps	12 volts / 75 amps	12 volts / 75 amps
Cooling System	Water Cooled	Water Cooled	Water Cooled	Water Cooled
Fuel tank capacity	48 litres	(45 version N + HS) 48 other models	(45 version N + HS) 48 other models	48 litres
PTO				
Rear PTO	Independent	Independent	Independent	Independent
Rear PTO Speeds	540 rpm	540 / 540E HS & NHS (540 C model)	540 / 540E HS & NHS (540 H model)	540 / 750 C model (540 CH)
Maximum power at PTO	37.6 hp	40.9 hp	47 hp	47 hp
Mid PTO	2000 rpm	2000 (C version only)	2000 (H Version only)	2000 (CH version only)
Front PTO	1000 Option	1000 Option	1000 Option	1000 Option
Hydraulic System				
Total capacity of tandem pump system	62.4 litres	55.1 (NHS/HS) 62.4 (C model)	55.1 (NHS/HS) 62.4 (H model)	62.4 litres
Available to External rear hydraulic valves	36.4 litres	36.4 litres	36.4 litres	36.4 litres
Position Control	Standard	Standard	Standard	Standard
4WD	Electric	Electric	Electric	Electric
Linkage	Cat 1	Cat 1	Cat 2	Cat 2
Maximum lift at Link arms	1717 kg	1717 kg	1717 kg	1717 kg
Maximum lift capacity 610 mm behind linkage	1467 kg	1467 kg	1467 kg	1467 kg
Number of Rear double acting spool valves	2	2	2	2
Transmission	HST(H and CH models) Mechanical (C model)	Mechanical synchromesh	Hydrostatic (H) (synchromesh mechanical for HS and NHS)	Mechanical C Model HST for CH model
Axle transmission	4 wheel drive	4 wheel drive	4 wheel drive	4 wheel drive
Transmission C / HS / NHS Models	16 fwd 16 rev. with creep	16 fwd 16 rev. with creep	16 fwd 16 rev. with creep	16 fwd 16 rev. with creep
Transmission H / CH Models	3 range, Twin pedal HST Shuttle	N/A	3 range, Twin pedal HST Shuttle	3 range, Twin pedal HST Shuttle
Differential lock for rear axle	Standard	Standard	Standard	Standard
Steering	Hydraulic Power steering	Hydraulic Power steering	Hydraulic Power steering	Hydraulic Power steering
Speeds				
Forward Speeds	0.34 -32.8 (C version) 0 - 29.7 (H and CH)	0.34 -32.8	0.34 -32.8 (HS / NHS version) 0 - 29.7 (H version)	0.34 -32.8 (C version) 0 - 29.7 (CH version)
Reverse Speeds	0.33 -32.0 (C version) 0 - 20.8 (H and CH)	0.33 -32.0	0.33 -32.0 (HS / NHS version) 0 - 20.8 (H version)	0.33 -32.0 (C version) 0 - 20.8 (CH version)
Dimensions				
Total length including link arms	3310 mm	3288 (HS & NHS) 3310 (C)	3288 (HS & NHS) 3310 (H)	3310 mm
Total width with AG wheels inset	1596 mm	1596 (HS & C) 1486(N)	1596 (HS) 1486 (N) 1596 (H model)	1596 mm
Total height with folding ROPS raised	2430 (H) mm	2430 (HS) 2231(N)	2233 (NHS mid ROPS) 2430 (H model and HS rear ROPS)	N/A
Total height with cabin	2363 (C & CH version) mm	2363 (C version) mm	-	2363 mm
Wheel base	1810 mm	1810 mm	1810 mm	1810 mm
Ground clearance	368 mm	368 mm	386 (N & HS) 368 (H)	368 mm
Turning radius	2610 (H & CH) 2640 (C Version) mm	2640 (HS & C) 3420 (N version) mm	2610 (H) 3420 (HS) 2640 (NHS)	2640 mm
Weight with folding ROPS	1598 kg	1610 kg	1598 (H) 1610 (HS & NHS)	N/A
Weight with Cabin	1887 (CH) 1848 (C) kg	1848 kg	N/A	1887 (CH) 1848 © kg
Maximum permissible weight	2885 (H) 3447 (C & CH) kg	2885 (HS & NHS), 3447 © kg	2885 kg	3447 kg
Tyres				
Front Ag Tyres	8 - 16	8 - 16	9.5-16 (HS & N) 8-16 (H)	8 - 16
Rear Ag Tyres	13.6-24	13.6-24	13.6-24	13.6-24
Radial front Ag Tyres	280 / 70 R16	280 / 70 R16	280 / 70 R16	280 / 70 R16
Radial Rear AG Tyres	360 / 70 R24	360 / 70 R24	360 / 70 R24	360 / 70 R24
Garden Pro Front	22.5-16PR	22.5-16PR	22.5-16 6PR	280 70 R16
Garden Pro Rear	27 x 12LL-15 6PR	27 x 12LL-15 6PR	27 x 12LL-15 6PR	380/70R24
Titan Multitrac turf front	29 12.50 -15	29 12.50 -15	29 12.50 -15	29x13.50-15
Titan Multitrac turf Rear	44 x 18.00 - 20	44 x 18.00 - 20	44 x 18.00 - 20	44 x 18.00 - 20
Alliance 550 Multi use front	250 / 80 R16	250 / 80 R16	250 / 80 R16	250 / 80 R16
Alliance 550 Multi use Rear	400 / 80 R24	400 / 80 R24	400 / 80 R24	400 / 80 R24

* NOTE: Specifications and design are subject to change without notice.



A tractor tailored to suit every task.

RX SERIES (66~73 HP)

Versatile and robust.

- CRDI diesel engine Stage V
- LCD dashboard with ECO monitor
- Air-suspension Grammar seat for driver.
- Powershuttle (24 fwd 24 rev gears with creep)
- Cruise speed PTO
- Airconditioned cabin or ROPS
- Automatic PTO

- Front and rear windshield wipers
- Bluetooth / MP3 player
- Generous ground clearance
- Ergonomic Control Levers
- Great lift capacity
- Highly manoeuvrable



Model	RX6630PC	RX7330P	RX7330PC
Engine			
Manufacturer	Kioti	Kioti	Kioti
Maximum power (ECE-R120)	hp 66	73	73
Rated speed	rpm 2600	2600	2600
Maximum torque	nm 240,5	240,5	240,5
Number of cylinders	4	4	4
Cylinder Capacity	cc 2435	2435	2435
Turbo	Yes	Yes	Yes
Compression ratio	17.4:1	17.4:1	17.4:1
Alternator	volts and amps 12v / 75a	12v / 75a	12v / 75a
Cooling system	Water Cooled	Water Cooled	Water Cooled
Fuel tank capacity	litres 95	95	95
PTO			
Rear PTO	Independent	Independent	Independent
Rear PTO speeds	rpm 540/ 540E	540/ 540E	540/ 540E
Maximum power HP at PTO	55,4	62,1	62,1
Mid Pto speed	N/A	N/A	N/A
Front pto (option) Speed	rpm 1000	1000	1000
Hydraulic system			
Total hyd flow capacity with tandem pump	67.6 l/min (41.6 for the external auxillary valves)	72.8 l/min (41.6 for the external auxillary valves)	72.8 l/min (41.6 for the external auxillary valves)
Position Control	Standard	Standard	Standard
Linkage	Cat 2 quick type	Cat 2 quick type	Cat 2 Quick type
Maximum lift capacity at link arm ends	kg 2075	2256	2256
Maximum lift at 610 mm behind linkage	kg 1630	1768	1768
Number of external rear spools	1 std + 2 x optional	1 std + 2 x optional	1 std + 2 x optional
Transmission	Mechanical	Mechanical	Mechanical
Front axle	Electric 4wd	Electric 4wd	Electric 4wd
Transmission ratios	24 x 24	24 x 24	24 x 24
Type of Shuttle	Hydraulic Power shuttle	Hydraulic Power shuttle	Hydraulic Power shuttle
Gear change	Power shift	Power shift	Power shift
Differential lock on rear axle	Standard	Standard	Standard
Steering	Hydraulic Power steering	Hydraulic Power steering	Hydraulic Power steering
Speeds			
Forward speeds	km/h 0.16 - 37	0.17 - 37.86	0.17 - 37.86
Reverse speeds	km/h 0.16 - 36	0.17 - 37.23	0.17 - 37.23
Dimensions			
Total Length including lower link arms	mm 3780	3810	3810
Total width (with minimal offset)	mm 1800	1960	1960
Total Height with Cabin	mm 2630	2655	2655
Wheelbase	mm 2100	2130	2130
Ground clearance	mm 420	440	440
Turning Radius	mm 3110	3370	3370
Weight (with cabin)	kg 2630	2795	2795
Maximum permissible weight	kg 4450 - 4800	4450 - 4800	4450 - 4800
Tyres			
Tractor front tyres AG	11.2 - 20	11.2 - 24	11.2 - 24
Tractor rear tyres AG	14.9 - 30	16.9-30	16.9-30
Front tractor radial AG	280/85 R20	340/65R18	340/65R18
Rear tractor Radial AG	380/85 R30	540/65R24	540/65R24
Front Turf Tyres	18.4-26 12PR	23.1-26 16PR	23.1-26 16PR
Rear Turf Tyres	38.4-26 4PR	44 x 18.00-20 4PR	44 x 18.00-20 4PR
Front Industrial multiuse 550	340/80R 18	300/80 R24	300/80 R24
Rear Industrial multiuse 550	440/80 R28	440/80 R30	440/80 R30

* note specifications and design are subject to change



The tractor for agriculture
PX SERIES (103~110~125 HP)

Simple and robust.

- CRDI Doosan diesel engine
- Powershuttle 32 fwd and 32 reverse gears
- Hi-Lo Double ranges
- Bluetooth / MP3 player
- Air conditioning/heating
- Grammar Air suspension seat
- Front and rear windshield wipers
- Telescopic mirrors
- LCD Dashboard with ECO Monitor
- Smooth response gear changes
- Automatic PTO feature
- Optional front linkage and PTO



Model	PX1053PC	PX1153PC	PX1303PC
Engine			
Manufacturer	Doosan	Doosan	Doosan
Maximum power (ECE-R120)	103 hp	110	125
Rated speed	2200 tr/min	2200	2200
Maximum torque	430 nm	430	430
Number of cylinders	4	4	4
Cylinder Capacity	3409 cc	3409	3409
Turbo	Yes	Yes	Yes
Compression ratio	17,1	17,1	17,1
Alternator	12 / 110 volts / amps	12 / 110	12 / 110
Cooling system	Water cooled	Water Cooled	Water Cooled
Fuel Tank capacity	130 litres	130	130
PTO Power	540/750/1,000 independent hp	540/750/1,000 independent	540/750/1,000 independent
Maximum Power	80,1 hp	92,6	102
Front PTO speed at Maximum	1000 rpm	1000	1000
Hydraulic System			
Oil Capacity with tandem pump	121 L/M (73 litres available to external auxillary)	121 L/M (73 litres available to external auxillary)	121 L/M (73 litres available to external auxillary)
Position Control	Standard	Standard	Standard (electric control internal and external)
Lift Linkage type	Cat 2	Cat. 2	Cat. 2
Maximum lifting capacity at link arm	4285 kg	4285	4285
Maximum lift 610mm behind link arm	3630 kg	3630	3630
Number of rear double acting valves	2	2	2
Axle Transmission	4 wheel drive	4 wheel drive	4 wheel drive
Transmission	Mechanical 32 x 32	Mechanical 32 x 32	Mechanical 32 x 32
Shuttle Type	Power Shuttle	Power Shuttle	Power Shuttle
Shifting	Manual with Hi/Low and electric hand clutch	Manual with Hi/Low and electric hand clutch	Manual with Hi/Low and electric hand clutch
Differential lock on Rear axle	Standard	Standard	Standard
Speeds			
Forward	0.15 - 40.97 km/h	0.15 - 40.97	0.15 - 40.97
Reverse	0.15 - 40.68 km/h	0.15 - 40.68	0.15 - 40.68
Dimensions			
Total length including link arms	4290 mm	4290	4290
Total width (min track width)	2150 mm	2150	2150
Total height of cabin	2770 mm	2770	2770
Wheel base	2370 mm	2370	2370
Ground clearance	495 mm	495	495
Turning Radius	4200 mm	4200	4200
Weight	4057 kg	4057	4082
Max permissible weight	7000 kg	7000	7000
Tyres			
Tractor front tyre AG	13.6-24	13.6 - 24	13.6 - 24
Tractor rear tyres AG	18.4 - 34	18.4 - 34	18.4 - 34
Front Radial AG	380/70 R24	380/70 R24	380/70 R24
Rear Radial AG	480/70 R34	480/70 R34	480/70 R34

* note specifications and design are subject to change



The vehicle for all types of terrain and jobs

K9 (24 HP)

Universal and powerful.

- New ergonomic design
- Double A-arm for optimal suspension
- Modern brightly lit dashboard
- Half-doors or full cabin with heater (optional)
- Sprayed Urethane coated rear load space for additional protection
- Road Homologated.

- Reduction of noise and vibration
- Shock absorbers with a helical spring and a stabilizer arm
- Modern brightly lit dashboard
- High ground clearance
- Comfortable access and seating for 3 persons.



Model	K9 2400	
Engine		
Manufacturer	Kioti	
Maximum Power	hp	24
Rated Speed	tr/min	3.000
Transmission	Belt CVT	
Number of cylinders	3	
Cylinder capacity	cc	1007
Cooling system	Water Cooling	
Fuel tank capacity	litres	37
Transmission		
Ranges	Low, High, neutral, reverse	
Selectable	2 or 4-wheel-drive	
Brakes	Hydraulic disc brake	
Parking brake	Brake engages on Disc caliper	
Differential	Locking on the rear wheels	
Low gear km/h	0 - 19	
High gear km/h	0 - 40	
Steering	Hydraulic power steering	
Dimensions		
Length	mm	3045
Width	mm	1590
Height	mm	1970
Wheel base	mm	2180
Ground clearance	mm	304
Drawbar Capacity	kg	590
Cargo capacity	kg	500
Weight	kg	930
Load space dimensions		
Length	mm	1110
Width	mm	1480
Height	mm	293
Capacity of load space	kg	500
Tipping method	Mechanical assisted with handle	
Tyres		
ATV front and rear	25 x 10 x 12	
Worksite front and rear	25 x 10 x 12	
Grass front and rear	25 x 10 x 12	
Pro Terrain ATV (option)	26 x 10-12	

Standard version of Kioti K9

- ROPS safety bar with 4 support posts
- Modern Dashboard: fully equipped with a fuel gauge, speedometer and ergonomic control levers
- 3 seats: Separate driver suspension seat and seat for 2 people with seat belts and rear supports
- Full road lighting
- Mirrors left and right
- Front hitch, rear hitch hook
- Front Bull bar protection
- Differential lock on the rear axle
- Parking brake alarm
- Urethane spray coated deck
- Suspension dirt and dust guard protectors

Options for K9 2400

- Floor mat
- Storage box under the hood
- Roof-opening
- Working and fog lights
- Skid plate kit Protective plate under the engine (recommended)
- Headrest (2 pieces)
- Mounting plate for the assembly of a winch
- Hydraulic tipping kit for load space
- Hydraulic tipping set with a detent control lever
- External hydraulics
- Reverse alarm
- Beacon lamp wiring kit
- Front windshield with a windshield wiper
- Fog light at the front (2 pieces)
 - Perforated metal plate at the back
 - Half-doors
 - Fully enclosed cabin with heating and fully opening front screen
 - Sliding window on Drivers door of full cabin
 - Galvanised livestock canopy, choice of barn or over the top doors
 - Red or Green bonnet and flashing

* NOTE: Specifications and design are subject to change without notice.

KIOTI in EUROPE

